




Sierra Components, Inc.

2222 Park Place, 3-E • Minden, Nevada 89423

Phone: 775.783.4940 Fax: 775.783.4947

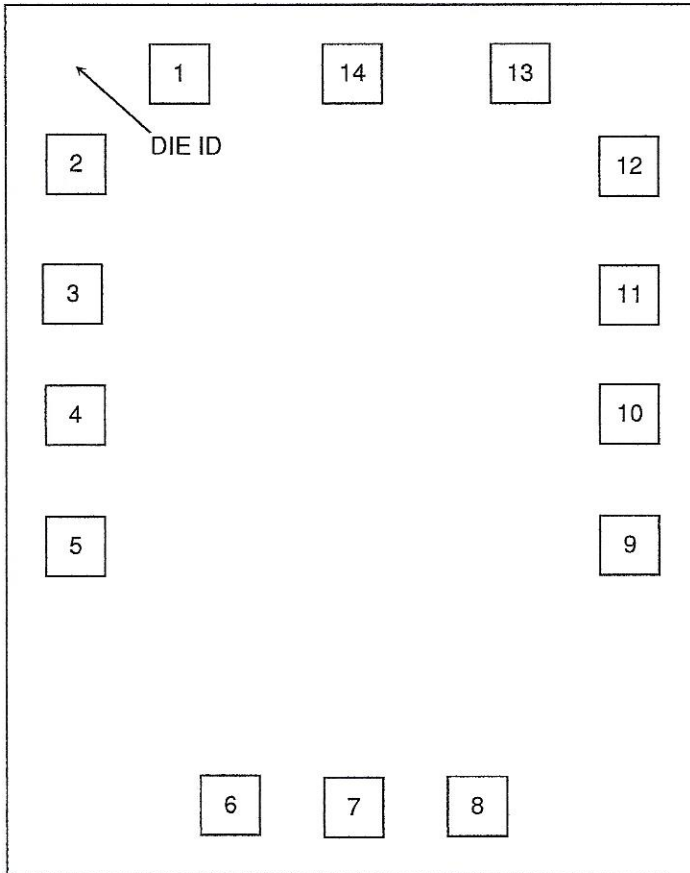

| PAD | FUNCTION |
|-----|-----------------|
| 1 | 1A |
| 2 | 1Y |
| 3 | 2A |
| 4 | 2Y |
| 5 | 3A |
| 6 | 3Y |
| 7 | GND |
| 8 | 4Y |
| 9 | 4A |
| 10 | 5Y |
| 11 | 5A |
| 12 | 6Y |
| 13 | 6A |
| 14 | V _{CC} |

NOTE

- This data is supplied for general information only and is believed to be correct at the time of publication.
- For critical applications, the customer is advised to verify device revision and pad coordinates, prior to processing
- Changes can be made without notification from the manufacturer.

Topside Metal: (AL)

Backside Metal: (Si)

Backside Potential: GND or Float

Bond Pad Size: 3.54 x 3.54 min

Mask Ref:

APPROVED BY: MG

DIE SIZE: 41 x 53 Mils

DATE: 11/27/18

MFG: Silicon Supplies

THICKNESS: 11 Mils

P/N: 74/54AC14

DG 10.1.2

Rev A 3-4-99