


Die Technology Ltd
 Corbrook Road, Chadderton,
 Lancashire OL9 9SD England
 Tel: +44(0)161 626 3827
 Fax: +44(0)161 627 2341 Fax: +44(0)161 626 7668
 Website: www.ditech.co.uk Email: sales@ditech.co.uk



Volume Semiconductor Supplier

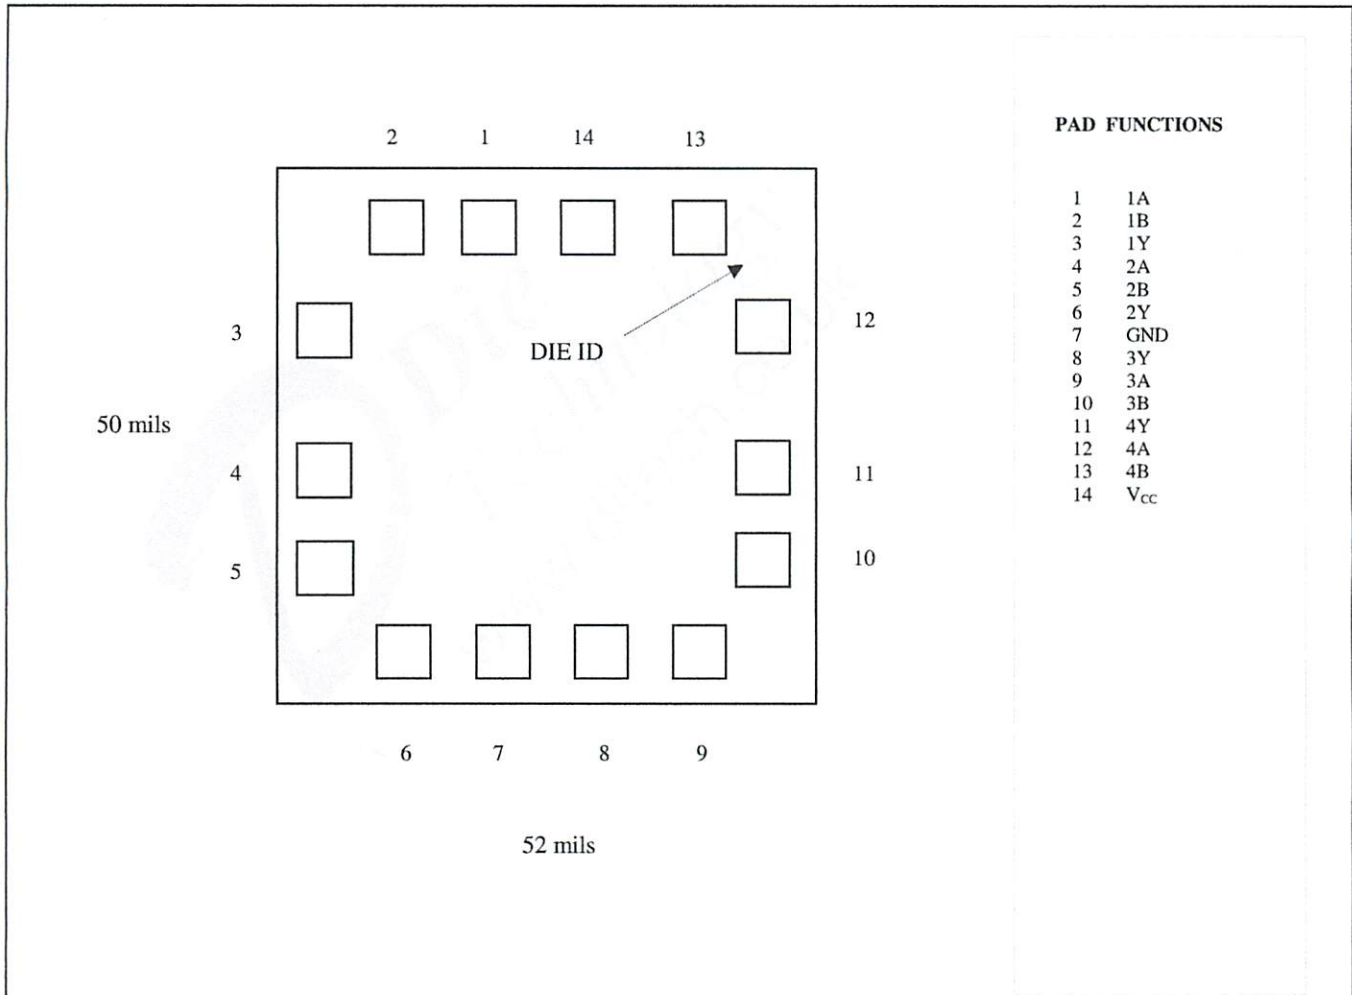

The information given is believed to be correct at the time of issue.
 Please verify your requirements prior to commencement of any assembly process, as no liability for omission or error can be accepted.
 Chip back potential is the level at which bulk silicon is maintained either by bond pad connection or in some cases the potential to which the chip back must be connected if stated above.

Note: 1 mil = 0.001inch

<p style="text-align: center;"><u>APPROVED</u></p> <p style="text-align: center;">G Bibby</p> <p style="text-align: center;">DATE: 31 Oct 05</p>	<p style="font-size: 1.2em; font-weight: bold;">54AS00</p> <p style="font-size: 1.2em; font-weight: bold;">FAIRCHILD</p>	<p style="text-align: center;"><u>DIE INFORMATION</u></p> <p>DIMENSIONS (Mils): 52 x 50 x 15 BOND PADS (Mils): 4 x 4 MASK. REF: DMS54AS00 GEOMETRY: A BACK POTENTIAL: Gnd</p>
<p style="text-align: center;"><u>SERIAL NUMBER</u></p> <p style="text-align: center;">005433</p>		<p style="text-align: center;"><u>METALLISATION</u></p> <p>TOP: Al BACK: Si</p>