




# Sierra Components, Inc.

2222 Park Place Building 3 Suite E • Minden, Nevada 89423

Phone: 775.783.4940 Fax: 775.783.4947

Chip back potential is the level which bulk silicon is maintained by on-chip connection, or it is the level to which the chip back must be connected when specifically stated below. If no potential is given the chip back should be isolated.

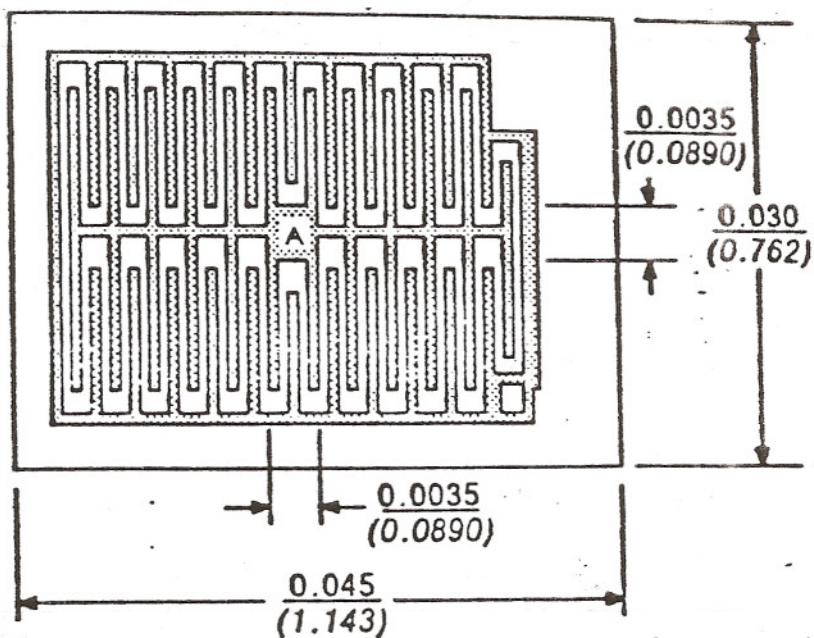

**Topside Metal: Al**

**Backside: -**

**Backside Potential: Cathode**

**Mask Ref: -**

**Bond Pads : .004"**

**APPROVED BY: CD**

**MFG: Siliconix**

**DIE SIZE : .030" x .045"**

**THICKNESS:**

**DATE: 12/8/03**

**P/N: CR530**