




Sierra Components, Inc.

2222 Park Place Building 3 Suite E • Minden, Nevada 89423
 Phone: 775.783.4940 Fax: 775.783.4947

Chip back potential is the level which bulk silicon is maintained by on-chip connection, or it is the level to which the chip back must be connected when specifically stated below. If no potential is given the chip back should be isolated.

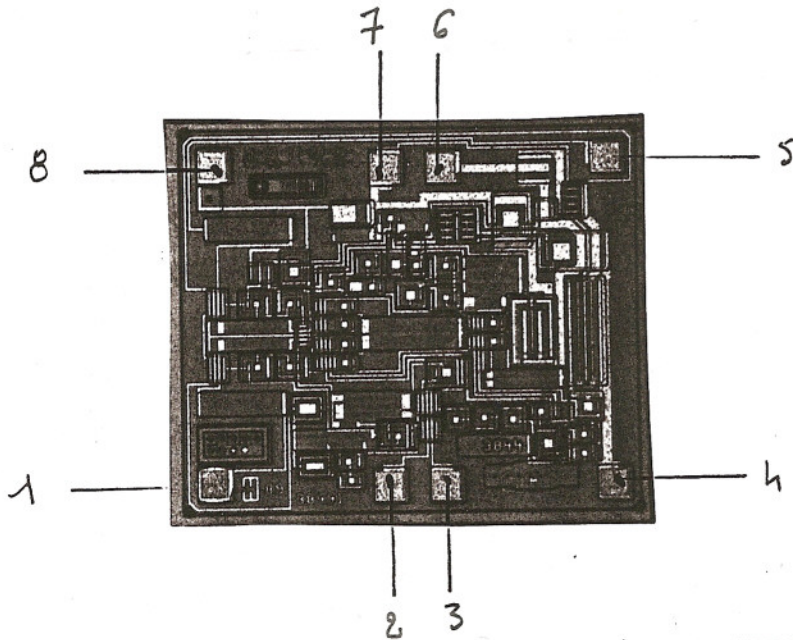

DEFINITION :

01-	BAL	11-
02-	-IN	12-
03-	+IN	13-
04-	V-	14-
05-	BAL	15-
06-	OUT	16-
07-	V+	17-
08-	COMP	18-
09-		19-
10-		20-

Top Material:
Backside Material:
Bond Pad Size:
Backside Potential:
Mask Ref:

APPROVED BY:MG

DIE SIZE :67x67

DATE: 1/5/09

MFG:Harris

THICKNESS:

P/N:HAO2522