




Sierra Components, Inc.

2222 Park Place Building 3 Suite E • Minden, Nevada 89423
Phone: 775.783.4940 Fax: 775.783.4947

Chip back potential is the level which bulk silicon is maintained by on-chip connection, or it is the level to which the chip back must be connected when specifically stated below. If no potential is given the chip back should be isolated.

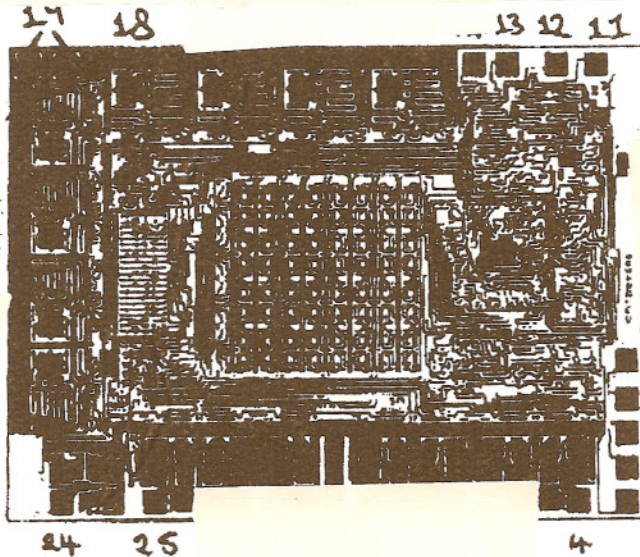

15	DIGIT
--	DIGIT
	DIGIT
	DIGIT
	V _{DD}
	DIGIT
	DIGIT
	DIGIT
	DIGIT
24	Seg f
25	Seg d

Topside Metal: Al

Backside: Si

Backside Potential:

Mask Ref:

Bond Pads : .004 min

APPROVED BY: CB

MFG: Harris

DIE SIZE: .137" x .102"

THICKNESS: .019"

DATE: 2/6/01

P/N: ICM7218