




# Sierra Components, Inc.

2222 Park Place Building 3 Suite E • Minden, Nevada 89423

Phone: 775.783.4940 Fax: 775.783.4947

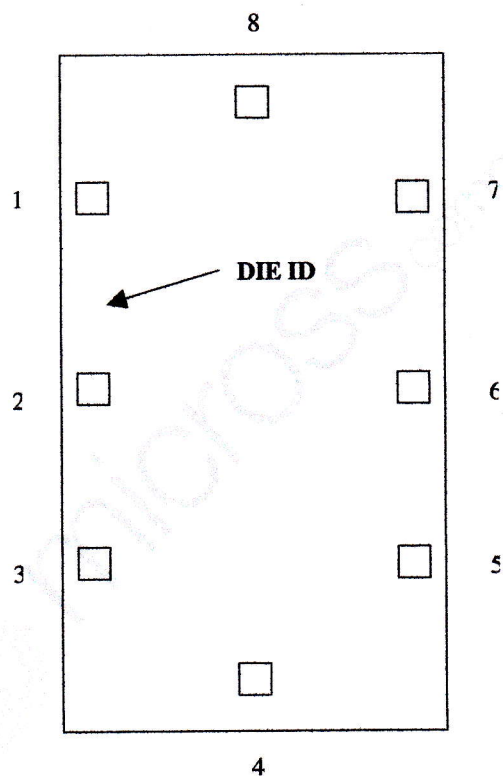

### PAD FUNCTIONS

1. OUT A
2. -IN A
3. +IN A
4. V-
5. +IN B
6. -IN B
7. OUT B
8. V+

The information given is believed to be correct at the time of issue.

Please verify your requirements prior to commencement of any assembly process, as no liability for omission or error can be accepted.

Back potential is the electrical potential of the substrate (bulk silicon), which may not require an electrical connection unless stated in this drawing.

Note: 1 mil = 0.001inch

<u>APPROVED</u>  GB ..... DATE: 19.07.12	<h2>OPA2227</h2>  <h3>TEXAS INSTRUMENTS</h3>	<u>DIE INFORMATION</u> DIMENSIONS (Mils): 85 x 126 x 25 BOND PADS (Mils): 4 x 4 MASK REF: GEOMETRY: CIC 02446 BACK POTENTIAL: V-
<b>DG 10.1.2</b> <b>Rev B, 7/19/02</b>		<u>METALLISATION</u> TOP: Al BACK: Silicon Nitride (or bare Si after backgrind)