




# Sierra Components, Inc.

2222 Park Place Building 3 Suite E • Minden, Nevada 89423

Phone: 775.783.4940 Fax: 775.783.4947

## PAD FUNCTIONS

1. +ERROR
2. -ERROR
3. COMP
4. CSS
5. RESET
6. -CURRENT RESET
7. +CURRENT SENSE
8. SHUT DOWN
9. RTIMING
10. CT
11.  $R_D$
12. SYNC
13. OUTPUT A
14.  $V_C$
15. GROUND
16. OUTPUT B
17. +VIN
18.  $V_{REF}$

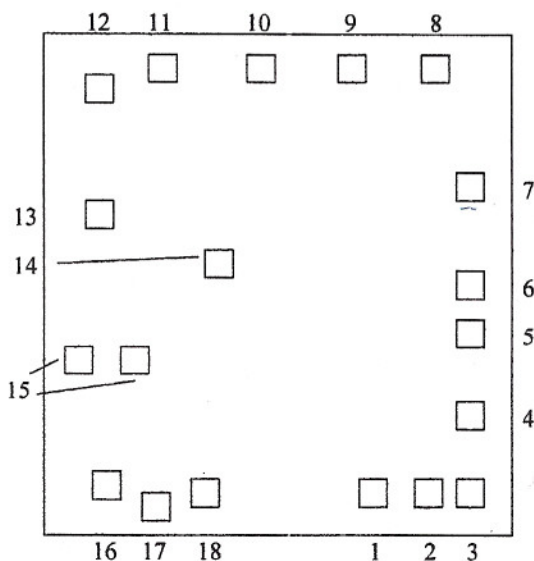

### DISCLAIMER

The data contained herein is supplied for general information only and is believed to be correct at the time of publication. These devices may change, without prior notification from the manufacturer.

Mintech Semiconductors Ltd cannot accept liability for any such changes, not recorded herein.

For critical applications, the customer is advised to verify device revision and pad coordinates, prior to processing.

### APPROVED

G.Denny

DATE: 21/10/08

### DEVICE TYPE(S): & MANUFACTURER

UC1526A

TEXAS INSTRUMENTS

NOMINAL DIE SIZE: 97 x 116 Mils

MIN. PAD SIZE:

BACK CONNECTION:

DIE STEP:

Mask: HJ

**DG 10.1.2**  
**Rev B, 7/19/02**

BOND PAD METAL:

BACK SIDE METAL: