




# Sierra Components, Inc.

2222 Park Place Building 3 Suite E • Minden, Nevada 89423

Phone: 775.783.4940 Fax: 775.783.4947

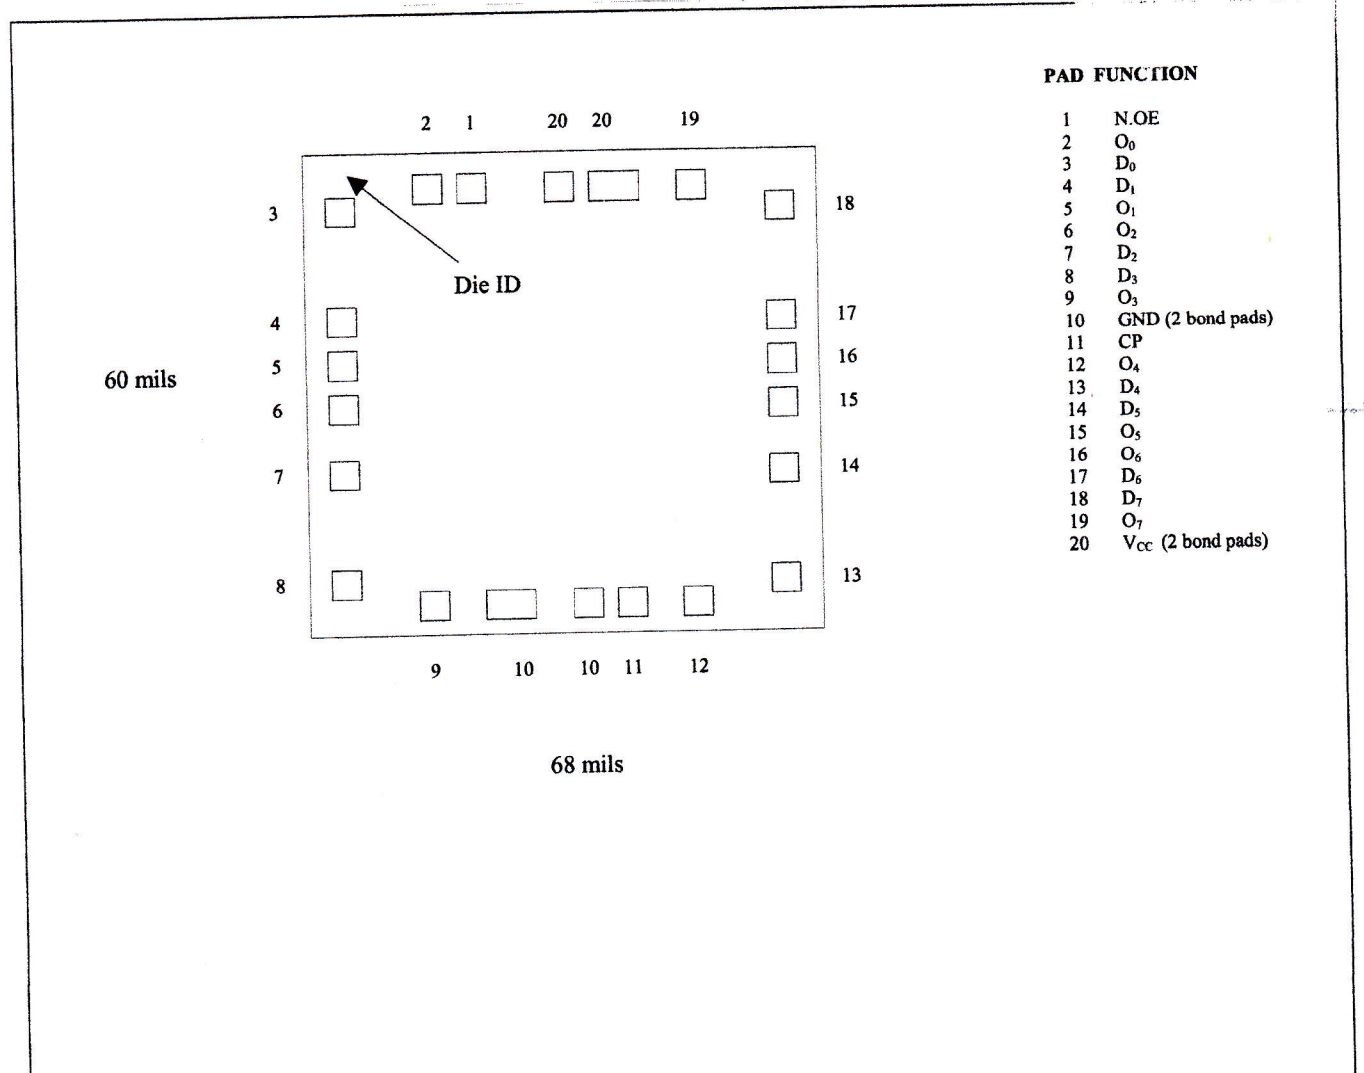

### PAD FUNCTION

- 1 N.OE
- 2 O<sub>0</sub>
- 3 D<sub>0</sub>
- 4 D<sub>1</sub>
- 5 O<sub>1</sub>
- 6 O<sub>2</sub>
- 7 D<sub>2</sub>
- 8 D<sub>3</sub>
- 9 O<sub>3</sub>
- 10 GND (2 bond pads)
- 11 CP
- 12 O<sub>4</sub>
- 13 D<sub>4</sub>
- 14 D<sub>5</sub>
- 15 O<sub>5</sub>
- 16 O<sub>6</sub>
- 17 D<sub>6</sub>
- 18 D<sub>7</sub>
- 19 O<sub>7</sub>
- 20 V<sub>CC</sub> (2 bond pads)

The information given is believed to be correct at the time of issue.  
 Please verify your requirements prior to commencement of any assembly process, as no liability for omission or error can be accepted.  
 Chip back potential is the level at which bulk silicon is maintained either by bond pad connection or in some cases the potential to which the chip back must be connected if stated above.

**Note: 1 mil = 0.001inch**

<b>APPROVED</b>  G.B  DATE: 2/2/01	<b>54ACTQ374</b>  <b>FAIRCHILD</b>	<b>DIE INFORMATION</b>  DIMENSIONS (Mils): 68 x 60 x 14 BOND PADS (Mils): 4 x 4 min MASK. REF: DIE ID: D374S BACK POTENTIAL: V <sub>CC</sub>
<b>DG 10.1.2</b> <b>Rev B, 7/19/02</b>		<b>METALLISATION</b>  TOP: Al BACK: Si